


HEATSTRIP® 

OUTDOOR HEATING

never looked so good

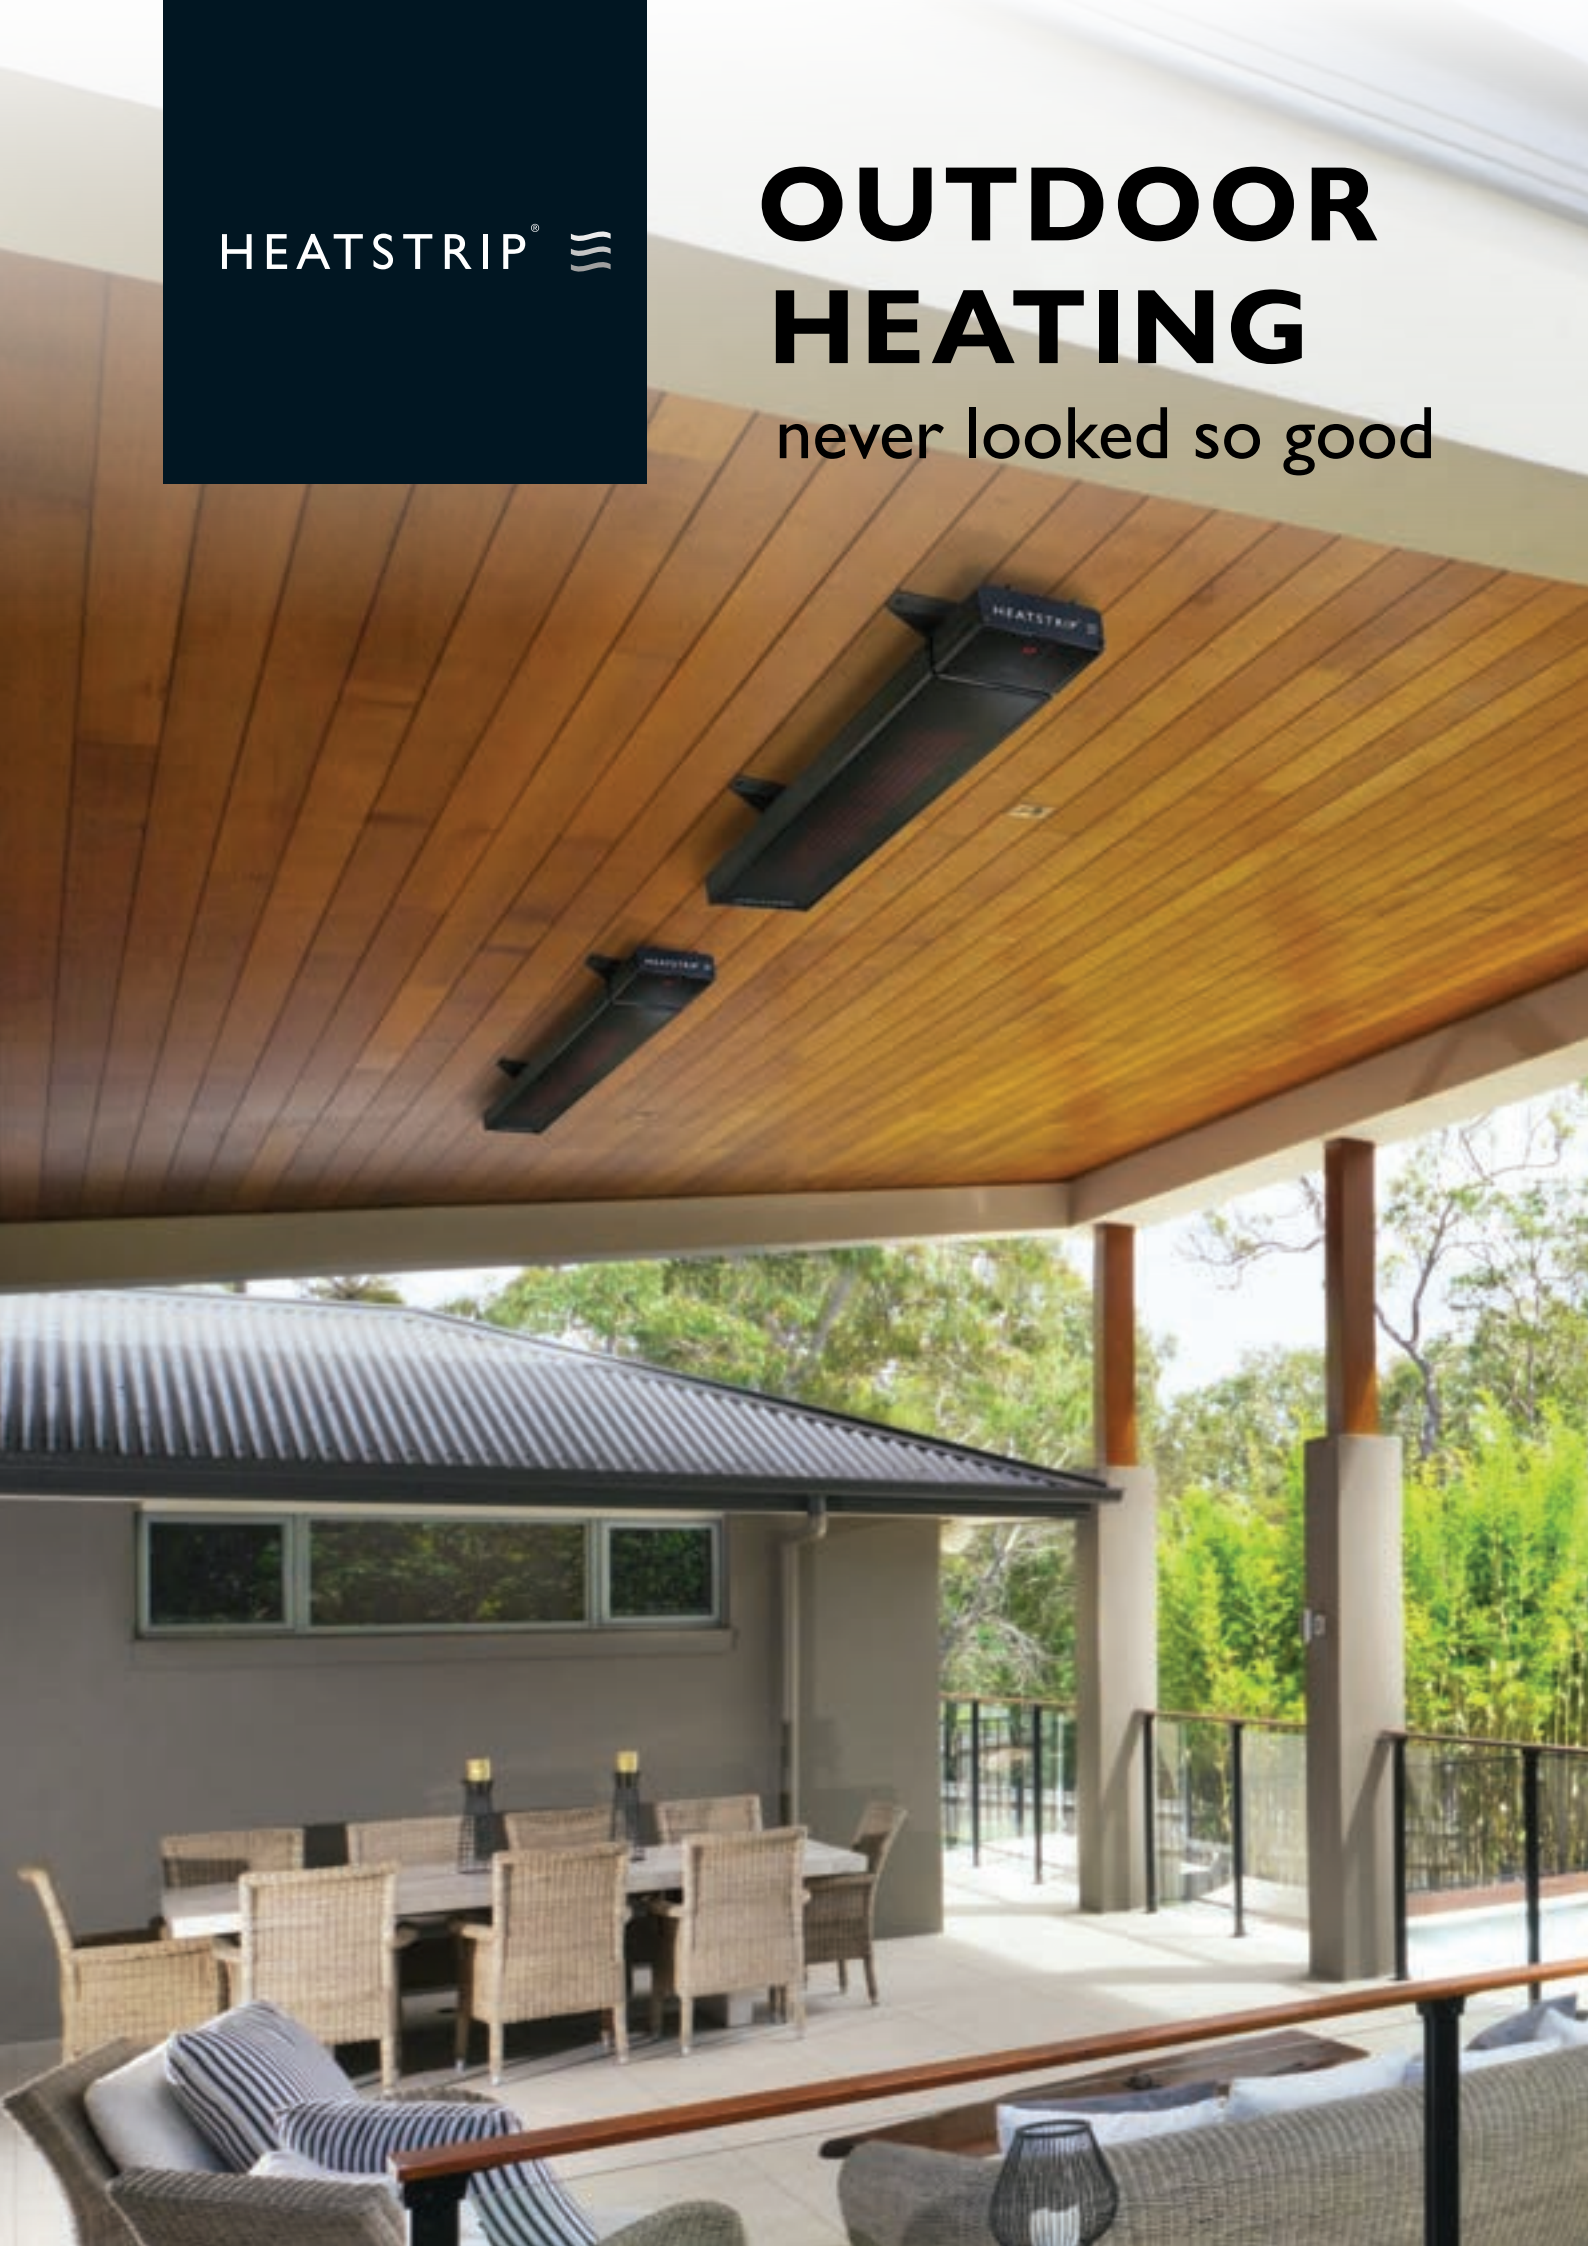

WORLD CLASS PRODUCTS & QUALITY



HEATSTRIP®

HEATSTRIP® outdoor heaters are proudly designed and engineered in Australia, and globally recognised for innovation, energy efficiency, and sleek design. Since 1988, HEATSTRIP® has delivered premium heating solutions that enhance outdoor comfort. Our slimline, unobtrusive heaters suit a wide range of residential, commercial, and hospitality spaces - eliminating the need for bulky units. HEATSTRIP® offers versatile solutions for patios, balconies, alfresco areas, pubs, clubs, and restaurants. Designed to help Kiwis enjoy outdoor living in comfort, all year round.

In 2014 Thermofilm was inducted into the Victorian Manufacturing Hall of Fame.

In 2017 HEATSTRIP Portable LPG heater TGH34PL won a Good Design Award in Consumer Products.



2014 VICTORIAN
MANUFACTURING
HALL OF FAME

Thermofilm Australia Pty Ltd



2013 HEATSTRIP CLASSIC

PRODUCT SELECTOR

CLASSIC WITH REMOTE & APP - PAGE 4

- Pergola / protected alfresco
- Difficult to heat indoor areas
- Cafe, garage, shed

Ideal Mounting Height 2.1-2.5m
Max Mounting Height 2.7m



INTENSE OFF-WHITE - PAGE 11

- Under cover protected areas
- Semi-exposed outdoor locations

Ideal Mounting Height 2.1-2.5m
Max Mounting Height 2.8m



ELEGANCE WITH REMOTE & APP - PAGE 5

- Protected alfresco
- Difficult to heat indoor areas

Ideal Mounting Height 2.1-2.5m
Max Mounting Height 2.7m



INTENSE WITH REMOTE & APP - PAGE 12

- Under cover protected areas
- Semi-exposed outdoor locations

Ideal Mounting Height 2.1-2.5m
Max Mounting Height 2.8m



ENHANCE WITH REMOTE & APP - PAGE 6

- Indoor / Outdoor
- Direct spot heating applications

Ideal Mounting Height 2.1-2.5m
Max Mounting Height 2.7m



INTENSE PORTABLE - PAGE 13

- Portable spot heating
- Dining / entertaining / work stations
- Suitable for indoor and outdoor areas

Indoor Heating Area 14m²
Outdoor Heating Area 5-9m²



INDOOR - PAGE 7

- Indoor
- Direct spot heating applications

Ideal Mounting Height 2.2-2.5m
Max Mounting Height 2.7m



WALL MOUNTED - PAGE 14

- Alfresco areas / hospitality / outdoor dining / kitchen / patios / balconies

Ideal Mounting Height 2-2.7m
Max Mounting Height 3.5m
Heating Area 16m²



MAX DC COMMERCIAL - PAGE 8

- High ceilings
- Exposed alfresco
- Balconies

Ideal Mounting Height 2.2-2.8m
Max Mounting Height 3m



PORTABLE LPG - PAGE 15

- Portable spot heating
- Outdoor dining / kitchen
- Hospitality
- Patios / courtyards / balconies

Heating Area 16m²



MAX DC WITH REMOTE - PAGE 9

- High ceilings
- Exposed alfresco
- Balconies

Ideal Mounting Height 2.2-2.8m
Max Mounting Height 3m



HEATSTRIP[®] CLASSIC

WITH REMOTE & APP



Classic slimline electric, all-black heating solution for your undercover, protected alfresco area, balcony, patio or verandah. Also suitable for indoor use.

- 2 models available :
Remote and App (THH2400AA / THH3200AA)
- Convenient DIY Installation for the 2400W model. 3200W model must be hard-wired by a licensed electrician.
- Standard mounting bracket can be used for wall or ceiling mounting.
- Bracket can also be used to suspend the heater using chains or wires.
- Ideal mounting height 2.1-2.5m. Max mounting height 2.7m.



Classic with remote & app

Remote, app plus smart home connectivity. Compatible with Google and Amazon smart home platforms. Bluetooth & WIFI.



Model	Running Costs**	Power	Current	Dimensions	Weight	Lead Length	Plug	Heating Area	Standard Bracket	Flush Mount Kit	Extension Poles
THH2400AA	80c / hr	2400 Watts	10 amps	1371x165x48mm	7 kg	1000 mm	Yes	4-5 m ²	ZBRAK-113B	THHAC-013	THYAC-047 (300mm) THYAC-048 (600mm)
THH3200AA*		3200 Watts	13.5 amps	1780x165x48mm	9 kg		No	5-6 m ²		THHAC-014	THYAC-049 (900mm) THYAC-050 (1200mm)

Materials of construction: High temperature all-black ceramic coated extruded alloy. IP55 rated.

** Running cost based off \$0.25/kWh energy tariff.

***This unit must be installed by a licensed electrician..**



App and remote controlled sleek, off-white electric heating solution for your undercover, protected alfresco area, balcony, patio or verandah. Also suitable for indoor use.

- Indoor/outdoor electric radiant heater.
- 2 models available: THE2400RA (2400W) & THE3200RA (3200W).
- Remote, app plus smart home connectivity. Compatible with Google and Amazon smart home platforms. Bluetooth & WIFI.
- Convenient DIY installation for the 2400W model. 3200W model must be hard-wired by a licensed electrician.
- Standard mounting bracket included can be used for wall or ceiling mounted. Bracket can also be used to suspend the heater using chains or wires.
- Ideal mounting height 2.1-2.5m. Max mounting height 2.7m.



Control Panel with On/Off functionality, High/Low temperature settings, 1/2/4 hour timer.



Remote or app for convenient control.

HEATSTRIP[®] ELEGANCE

WITH REMOTE & APP

WITH REMOTE,
APP CONTROL
& SMART HOME
CONNECTIVITY
BLUETOOTH
& WIFI




Model	Running Costs**	Power	Current	Dimensions	Weight	Lead Length	Plug	Heating Area	Standard Bracket	Flush Mount Kit	Extension Poles
THE2400RA	60c / hr	2400 Watts	10 amps	1306x170x42.7mm	7 kg	1000 mm	Yes	4-5 m ²	ZBRAK-113W	THERAC-056	THEAC-043 (300mm) THEAC-044 (600mm)
THE3200RA*	80c / hr	3200 Watts	13.3 amps	1710x170x42.7mm	9 kg	1000 mm	No	5-6 m ²	ZBRAK-113W	THERAC-057	THEAC-045 (900mm) THEAC-046 (1200mm)

Materials of construction: High temperature off-white ceramic coated extruded alloy. IP55 rated.
** Running cost based off \$0.25/kWh energy tariff.

*This unit must be installed by a licensed electrician.

HEATSTRIP[®] ENHANCE

WITH REMOTE & APP

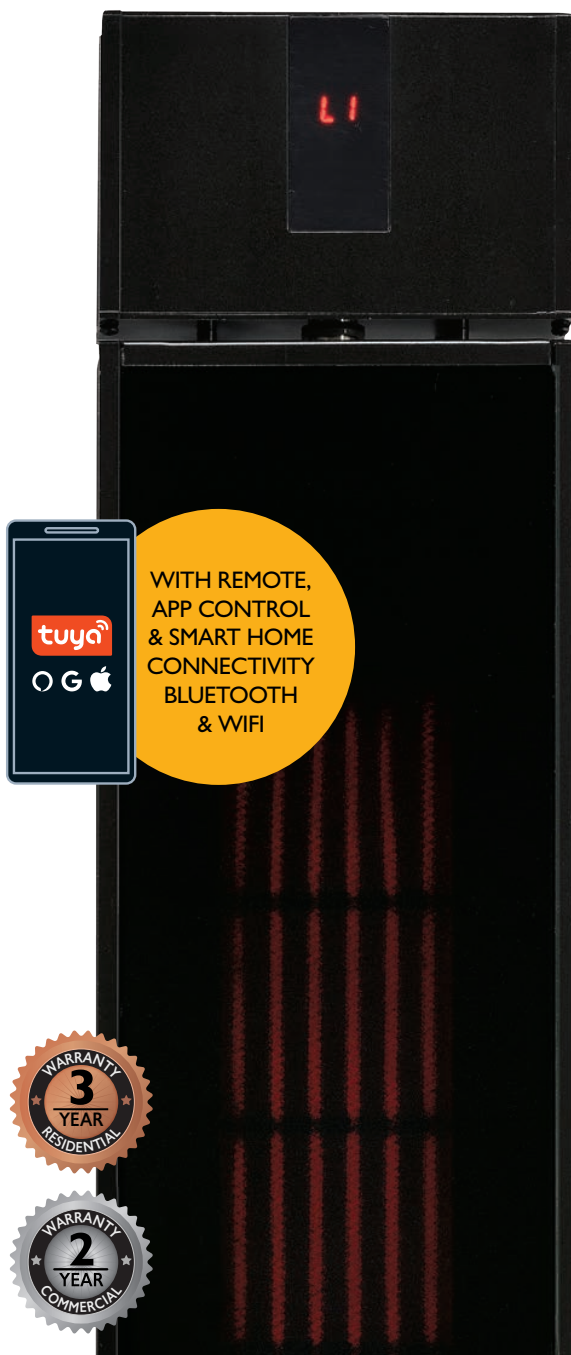

This sleek, slimline heater with a smooth German Schott glass front is the perfect all-black electric heating solution for instant performance. Easily control the heater with the included remote and app, with a timer ranging from 0-24 hours & 3 different heating levels. Whether you need localized or direct spot heating indoors or outdoors, this heater is sure to meet your needs.

- Indoor/outdoor electric radiant heater.
- 2 models available THG2400BA (2400W) & THG3200BA (3200W).
- Remote, app plus smart home connectivity. Compatible with Google and Amazon smart home platforms. Bluetooth & WIFI.
- Convenient DIY Installation for the 2400W model. 3200W model must be hard-wired and installed by a licensed electrician.
- Ideal mounting height 2.1-2.5m. Max mounting height 2.7m.



App and remote control provides 3 heat levels with adjustable timer options from 0-24 hours with the touch of a button.



Suitable for wall & ceiling mounting or suspension via chains or wires.

Model	Running Costs**	Power	Current	Dimensions	Weight	Lead Length	Plug	Heating Area	Standard Bracket	Flush Mount Kit
THG2400BA	60c / hr	2400 Watts	10 amps	920x187x76mm	6 kg	1000 mm	Yes	6-8 m ²	ZBRAK-154	THGAC-001
THG3200BA*	80c / hr	3200 Watts	13.3 amps	1020x187x76mm	8 kg	1000 mm	No	8-12 m ²	ZBRAK-154	THGAC-002

Materials of Construction: High temperature off-white ceramic coated extruded alloy. IP55 Rated..


** Running cost based off \$0.25/kWh energy tariff.

***This unit must be installed by a licensed electrician**



Indoor is a range of medium intensity electric radiant heaters for protected indoor heating applications. Making their way onto the ceilings of homes and businesses alike, these electric indoor heaters are functionally stylish and fast heating.

- Medium intensity electric radiant heater for protected indoor heating applications such as bathrooms or ceilings of homes and businesses.
- Stylish, modern, sleek slimline design
- Effective & efficient electric room heater solution for open indoor areas
- 2 models available THS800A & THS1200A.
- Quiet, maintenance-free operation
- Flexible mounting options
- Suitable for commercial and residential applications
- Ideal mounting height 2.2-2.5m. Max mounting height 2.7m.




Suitable for wall & ceiling mounting or suspension via chains or wires.

Optional Controllers

HARDWIRED (TT-MTM)
Wall mounted controller and remote control.



DIY (TT-MTR-PLUG)
Timer switch remote control of plug-in heaters. Max 10amps.

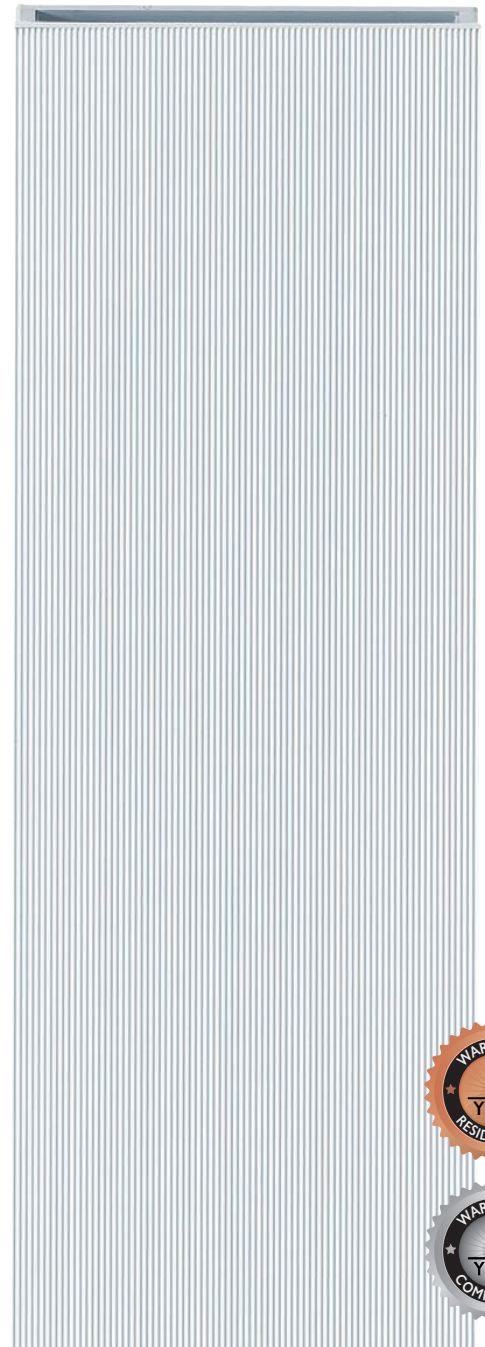

Model	Power	Current	Dimensions	Weight	Lead Length	Plug	Heating Area
THS800A	800 Watts	3.3 amps	624 x 235 x 48mm	4 kg	1000 mm	Yes	5-8 m ²
THS81200A	1200 Watts	5 amps	924 x 235 x 48mm	6 kg	1000 mm	Yes	8-12 m ²

Materials of Construction: High temperature off-white ceramic coated extruded alloy. IP45 Rated.

***This unit must be installed by a licensed electrician**

HEATSTRIP[®] MAX DC

WITH REMOTE




Max heat, max style with this heating solution for exposed and hard to heat areas such as balconies, pergolas, warehouses and restaurants.

- Electric infrared heater.
- 2 models available. THX2400DCR (2400W) & THX3600DCR (3600W).
- Dual heat infrared carbon element technology and upgraded heat reflector design that delivers world class performance.
- The remote and control panel provides 3 heat levels with adjustable timer options from 0-24 hours with the touch of a button.
- Convenient DIY installation for the 2200W model. 3600W model must be hard-wired by a licensed electrician.
- Ideal mounting height 2.2-2.8m. Max mounting height 3m.



Anodised alloy components provide corrosion protection, also suitable for coastal locations.



Commercial quality and construction. With a stylish hexagonal grille and black finish.



Model	Running Costs**	Power	Current	Dimensions	Weight	Lead Length	Plug	Heating Area	Mounting Bracket	Flush Mount Kit	Extension Poles
THX2400DCR	60c / hr	2400 Watts	10 amps	979x170 x80mm	6 kg	1000 mm	Yes	7-12 m ²	ZBRAK-132B	THXAC-034	THYAC-047 (300mm) THYAC-048 (600mm) THYAC-049 (900mm) THYAC-050 (1200mm)
THX3600DCR	90c / hr	3600 Watts	15 amps	1190x170x80mm	8 kg	1000 mm	No*	11-18 m ²	ZBRAK-132B	THXAC-035	

Materials of Construction: Anodised alloy casing and end caps, with a powder coated grill (Black) IPX5.

** Running cost based off \$0.25/kWh energy tariff.

***This unit must be installed by a licensed electrician**



Introducing the New MAX DC, designed to deliver high radiant infrared heat, making it ideal for exposed outdoor areas. Its dual element design ensures a compact unit with maximum efficiency. Perfect for commercial settings such as hospitality venues, restaurants, and warehouses, the MAX DC provides instant warmth.

- Commercial Electric Infrared Heater.
- 2 models available THX4000DC (4000W) & THX6000DC (6000W).
- Dual heat infrared carbon element technology and upgraded heat reflector design that delivers world class performance.
- High radiant infra-red temperature which is perfect for exposed outdoor sites.
- Must be hard-wired by a licensed electrician.
- Ideal mounting height 2.2-2.8m. Max mounting height 3m.



Commercial quality and construction.



Suitable for both direct mounting & suspending.

HEATSTRIP[®] MAX DC COMMERCIAL



Model	Running Costs**	Power	Current	Dimensions	Weight	Lead Length	Plug	Heating Area	Mounting Bracket	Extension Poles
THX4000DC	\$1.12 / hr	4000 Watts	16.6 amps	1134x170 x80mm	5.1 kg	1500 mm	No	12 m ²	ZBRAC-132B	THYAC-047 (300mm) THYAC-048 (600mm)
THX6000DC	\$1.68 / hr	6000 Watts	25 amps	1274x170x80mm	5.7 kg	1500 mm	No*	16 m ²	ZBRAC-132B	THYAC-049 (900mm) THYAC-050 (1200mm)

Materials of Construction: Aluminium Alloy, IPX5 Rated.

** Running cost based off \$0.28/kWh energy tariff.

*This unit must be installed by a licensed electrician



HEATSTRIP® INTENSE


OFF WHITE

High output, instant heat. Ideal for undercover and semi exposed outdoor areas or indoor use.

- Electric infrared instant high temperature heater.
- 2 models available: THY2200W (2200W) and THY3200W (3200W).
- Convenient DIY installation for the 2200W model. 3200W model must be hard-wired by a licensed electrician.
- All off-white construction with hexagonal grill is corrosion protected for most environments.
- Standard mounting bracket included for wall or ceiling mounting. Bracket can be used to suspend the heater using chains or wires.
- Ideal mounting height 2.1-2.5m. Max mounting height 2.8m.



Corrosion resistant
"off-white" slimline heater.



Carbon filament electric infra-red
element, providing instant heat.

Optional Controllers

HARDWIRED (TT-MTM)
Wall mounted
controller and
remote control.



DIY (TT-MTR-PLUG)
Timer switch remote
control of plug-in
heaters. Max 10amps.



Model	Running Costs**	Power	Current	Dimensions	Weight	Lead Length	Plug	Heating Area	Standard Bracket	Flush Mount Kit	Extension Poles
THY2200W	55c / hr	2200 Watts	9.2 amps	1068x120x90mm	6 kg	1000 mm	Yes	5-9 m ²	ZBRAK-132W	THYAC-053	THEAC-043 (300mm) THEAC-044 (600mm)
THY3200W*	80c / hr	3200 Watts	13.3 amps	1270x120x90mm	7 kg	1000 mm	No	8-13 m ²	ZBRAK-132W	THYAC-054	THEAC-045 (900mm) THEAC-046 (1200mm)

Materials of construction: High temperature off-white ceramic coated extruded alloy. IPX5 rated.
** Running cost based off \$0.25/kWh energy tariff.

***This unit must be installed by a licensed electrician.**

HEATSTRIP[®] INTENSE

WITH REMOTE & APP



This sleek, all-black electric heating system provides a modern and attractive outdoor heating solution with high output and instant heat. Perfect for undercover and semi-exposed outdoor areas or indoor use, you can control it with an app or remote for added convenience.

- Indoor/outdoor electric radiant heater.
- 2 models available THB2200BA (2200W) & THB3200BA (3200W).
- Remote, APP plus smart home connectivity. Compatible with Google and Amazon smart home platforms. Bluetooth & WIFI.
- Convenient DIY Installation for the 2200W model. 3200W model must be hard-wired by a licensed electrician.
- Standard mounting bracket can be used for wall or ceiling mounting. Bracket can also be used to suspend the heater using chains or wires.
- Ideal mounting height 2.1-2.5m. Max mounting height 2.8m.
- Optional Accessories available. (See page 16 for more information).



High performance infra-red electric heater. That provides instant heat.



App and remote control provides 3 heat levels with adjustable timer options from 0-24 hours with the touch of a button.

Model	Running Costs**	Power	Current	Dimensions	Weight	Lead Length	Plug	Heating Area	Standard Bracket	Flush Mount Kit	Extension Poles
THB2200BA	55c / hr	2200 Watts	9.2 amps	900x122x90mm	6 kg	1000 mm	Yes	5-9 m ²	ZBRAK-132B	THBAC-001	THYAC-047 (300mm) THYAC-048 (600mm)
THB3200BA*	80c / hr	3200 Watts	13.3 amps	1040x122x90mm	7 kg	1000 mm	No	8-13 m ²	ZBRAK-132B	THBAC-002	THYAC-049 (900mm) THYAC-050 (1200mm)

Materials of Construction: Black anodized alloy casing and end caps. Powder coated grille. IPX5 Rated
** Running cost based off \$0.25/kWh energy tariff.

***This unit must be installed by a licensed electrician**




An attractive portable outdoor heating solution, providing high output, instant heat. Suitable for spot heating tables, lounges, entertaining areas and work stations.

- Electric Infrared Portable Heater.
- THY2200P (2200W).
- With high quality, robust, all black construction, components are sub-assembled for easy final DIY installation.
- In-built wheels for easy portability and storage.
- 3-year residential and 2-year commercial warranty.



Ideal for indoor and outdoor use. In-built wheels for easy portability and storage.



Includes a high-performance carbon filament electric infra-red element, providing instant heat.

HEATSTRIP[®] INTENSE

OFF WHITE



Optional Controller

DIY (TT-MTR-PLUG)
Optional controller is available for easy DIY functions with LED indicators, 1/2/4 hour timer & remote control On/Off.



Model	Running Costs**	Power	Current	Dimensions	Weight	Lead Length	Plug	Heating Area	Optional Controller
THY2200P	55c / hr	2200 Watts	9.2 amps	1068x2050x500mm	20 kg	3000 mm	Yes	5-9 m ²	TT-MTR-PLUG

Materials of construction: Black anodized alloy casing and end caps. Powder coated grille. IPX5 rated.
** Running cost based off \$0.25/kwH energy tariff.

HEATSTRIP®

WALL MOUNTED



HEATSTRIP® Wall Mounted Gas heaters are a stylish addition to any outdoor area.

- Natural Gas Wall Mounted Heater.
- TGH34WN-2 (Natural Gas model, 34MJ).
- TGH34WL-2 (LPG Model, 34 MJ)
- Suitable for alfresco outdoor dining areas, patios, courtyards and verandas.
- World-class wind protection rating at 16 km/hr.
- Protective grille and reflector included as standard, to guarantee safe operation.
- Wall mounting bracket allows for multiple mounting angles.



Electronic, battery-operated finger pull On/Off controls, makes operation so easy and effortless.



Heater built from stainless steel with high temperature paint coating.



The standard heat reflector ensures only 500mm overhead clearance is required. The optional HeatShield (TGHAC-003) reduces this to 300mm clearance.



34MJ, 4 tile commercial grade ceramic burner, with market leading wind protection rating of 16km/hr.

Model	Running Costs**	Tiles	MJ	Dimensions	Weight	Ignition	Heating Area	Heat Shield	Extension Pole	Gas Type
TGH34WN-2	\$68c / hr	4	34	650x190x380mm	11.5 kg	Electronic	11.5 m ²	TGHAC-003	TGHAC-004	NG
THG34WL-2*	\$2.00 / hr	4	34	650x190x380mm	11.5 kg	Electronic	11.5 m ²	TGHAC-003	TGHAC-004	LPG

Materials of Construction: Head- Stainless steel (430ss) with high temperature paint coating.
 ** Running cost based off \$2.78pH



HEATSTRIP®

PORTABLE LPG

The new and upgraded HEATSTRIP® wall mounted gas heaters and Portable LPG gas heater are a stylish addition to any outdoor area. Ideal for undercover and semi exposed outdoor areas.

- Portable LPG heater. TGH34PL-2 (34MJ, 4 tile).
- Wind protection rating of 16km/hr.
- Suitable for alfresco, patios, outdoor dining areas, outdoor kitchens, courtyards, verandas and hospitality.
- Fully concealed gas pipes and bottle.
In-built wheels for easy portability and storage.
- Optional heater cover also available for your heater.
- Wall mounting bracket allows for multiple mounting angles



Electronic, battery-operated finger pull on/off controls, makes operation so easy and effortless.



The standard heat reflector ensures only 500mm overhead clearance is required. The optional HeatShield (TGHAC-003) reduces this to 300mm clearance.



Model	Running Costs**	Tiles	MJ	Dimensions	Weight	Ignition	Heating Area	Heat Shield	Cover or Extension Pole	Gas Type
TGH34PL-2 (Portable LPG)	\$2.00 / hr	4	34	650x670x2118mm	31.5 kg	Electronic finger pull	16 m ²	TGHAC-003	TGHCOVER	LPG


Materials of Construction: Head- Stainless steel (430ss) with high temperature paint coating. Stand: E-coated mild steel with powder coated finish. ** Running cost based off \$2.78pH.

ACCESSORIES

We have a wide range of mounting accessories and controllers are available. Let your HEATSTRIP outdoor heater be a feature, or let it blend with in with your choice of décor.

Mounting accessories for **Classic & Elegance Models**


Standard mounting bracket can be used for wall, ceiling mounting. Bracket can also be used to suspend the heater using chains or wires.

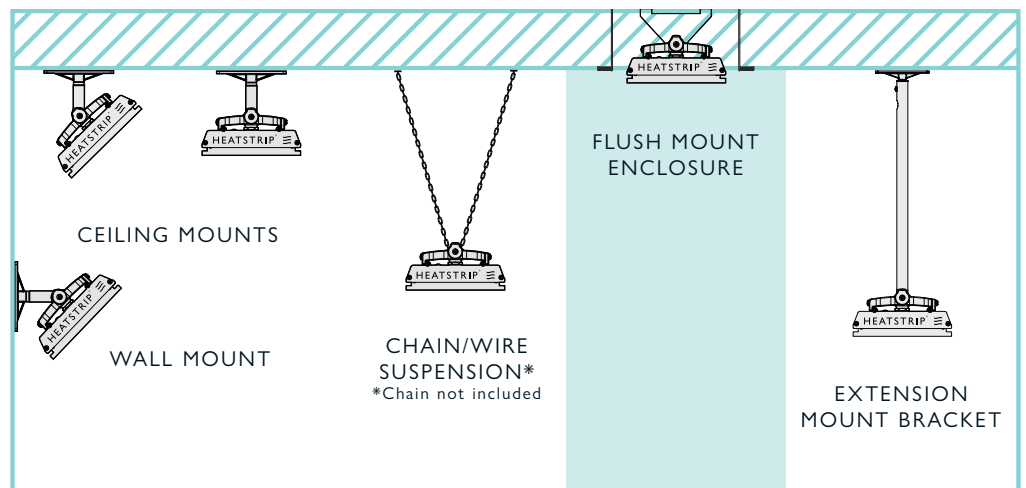

Available in silver, white, black (Matching coloured brackets are included with the heater).



Flush Mount Kits are available for each model. Available in silver, white or black trim.



Extension poles available in 4 sizes (300/600/900/1200mm) in silver, white or black.

Mounting accessories for **Intense & Max Models***

Standard mounting bracket can be used for wall, ceiling mounting. Bracket can also be used to suspend the heater using chains or wires.



Available in black or white (Matching coloured brackets are included with the heater).




Flush Mount Kits are available for each model. Available in black or white trim.



Extension poles available in 4 sizes (300/600/900/1200mm) in silver, white or black.

Mounting accessories for Enhance Models

Standard mounting bracket can be used for wall, ceiling mounting. Bracket can also be used to suspend the heater using chains or wires.

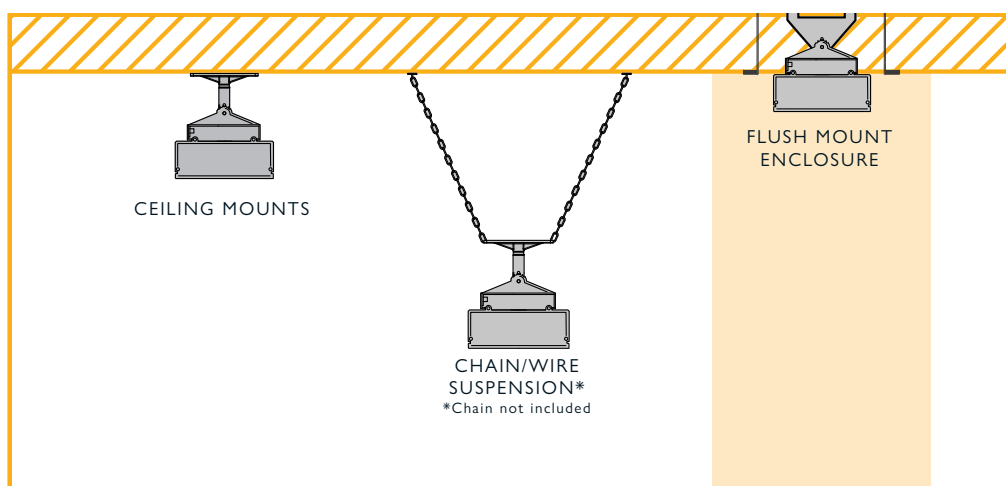

Flush Mount Kits are available for each model. Available in black trim.



Standing mounting bracket can be used for wall, ceiling mounting or can be used to suspend the heater using chains or wires.

Accessories for Wall Mounted Gas Models



Ceiling mount extension pole. Allows heater to be suspended from the ceiling.



The HeatShield allows for low clearance installations, 300mm from the ceiling.

Optional Controllers for Classic, Elegance, Intense, Intense White, Intense Portable & Max Models



HARDWIRED - Wall mounted controller & remote control.



DIY - Timer switch remote control of plug-in heaters. Max 10amps.

HEATSTRIP® 

0800 666 2824

sales@glendimplex.co.nz